

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
14 November 2002 (14.11.2002)

PCT

(10) International Publication Number
WO 02/091780 A1

- (51) International Patent Classification⁷: H04Q 7/38 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/EP01/05272
- (22) International Filing Date: 9 May 2001 (09.05.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor; and
(75) Inventor/Applicant (*for US only*): BAJKO, Gabor [HU/HU]; Damjanich u. 26/B, H-1072 Budapest (HU).
- Published:
— with international search report
- (74) Agent: LESON, Thomas, Johannes, Alois; Tiedtke-Bühling-Kinne, Bavariaring 4, 80336 Munich (DE).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD FOR INDICATING A UE THAT IT MUST REGISTER

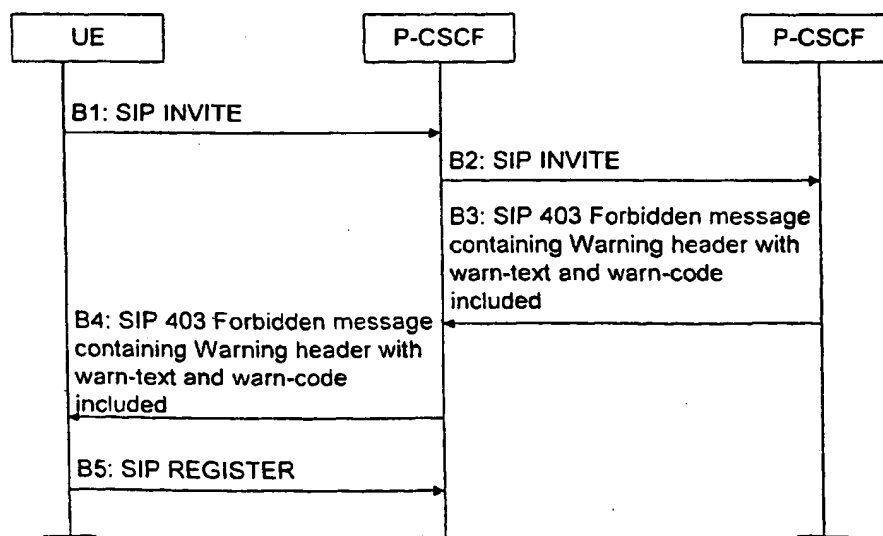

(57) Abstract: The invention proposes a method for controlling a network, wherein the network offers services to registered users, the method comprising the steps of receiving (A1) a service request from network device (UE) of a user, checking whether the user is registered or not, and if the user is not registered, generating a response message including a warn information and sending (A2; B3 to B4) the response message to the network device (UE) of the user. The invention also proposes a corresponding network device. In this way, a user is informed that he has to register before he can obtain any services from the network.

WO 02/091780 A1

"METHOD FOR INDICATING A UE THAT IT MUST REGISTER"

5 Field of the invention

The present invention relates to a method and network for controlling a network which offers services to registered users.

10

BACKGROUND OF THE INVENTION

The invention concerns networks which offer services to registered users. For example, in the IP Multimedia (IM) Subsystem as defined by the 3rd Generation Partnership Project (3GPP), it is necessary for an UE to be registered before the UE can make use of the multimedia services.

20

Thus, in case the user (i.e., UE) does not send a register request (e.g., a SIP (Session Initiation Protocol) REGISTER message) first, the network is not able to handle service requests from that user, which leads to a failure. In turn, the user is not notified about the failure and, hence, is not able to identify the reason for the failure, i.e., the non-acceptance of the service request.

30 Moreover, in a 3GPP environment, the network can initiate a Network Initiated De-registration. This is performed, for example, in order to avoid problems in the servers. The user may or may not be notified about the action, depending on whether he is previously subscribed to be notified and it is reachable or not.

35

- 2 -

If the user has been de-registered from the network but he was not notified because of one of the above listed reasons, he may anytime send a session initiation request
5 to the network. If that is the case, the network can not serve the user since it is not registered. However, also in this case the user is not aware of the fact that he is no longer registered.

10 Thus, the above situations lead to the problem that a user can not be served and that the user is not aware why the network does not accept his service request.

15 SUMMARY OF THE INVENTION

Therefore, the object underlying the invention resides in removing the above drawbacks of the prior art.

20 This object is solved by a method for controlling a network, wherein the networks offers services to registered users, the method comprising the steps of
receiving a service request,
checking whether a user requesting the service is
25 registered or not, and
if the user is not registered, generating a response message including a warn information into a response message and sending the response message to the user.

30 Alternatively, the above object is solved by a network control device for controlling a network, wherein the networks offers services to registered users, , wherein the device is adapted

to receive a service request, to check whether a
35 user requesting the service is registered or not, and

- 3 -

generate a response message containing a warn information to the user, in case the user is not registered.

Thus, by the method and control device according to the
5 invention, the user is automatically informed that he is not registered. Hence, an easy handling of service requests of non-registered users is achieved.

The response message may be a SIP (Session Initiation
10 Protocol) response. Moreover, the SIP response may be a 403 Forbidden response. Hence, a predefined standard message may be used for transporting the warn information. Therefore, the invention can easily be applied into existing systems.

15 The warn information may comprise a warn-text. This warn-text may be intelligible to the user such that he can easily be informed about the situation.

20 The warn-text may be a predefined warn-text. In this way, the user can be informed more clearly, since the warn-text is predefined and, hence, familiar to the user.

The warn information may comprise a predefined warn-code.
25 In this way, also the user equipment (UE) of the user can easily be informed about the non-registration by using the predefined code.

Furthermore, an automatic registration may be triggered
30 in the network device of the user. That is, the network device of the user may be adapted to perform an automatic registration in reaction to the response message received which contains the specific warn-code. In this way, the necessary registration is performed without that the user
35 has to command this.

- 4 -

Moreover, it may be checked whether the user had a valid registration before or not, wherein in case the user had no valid registration before, the information that a
5 registration is required is inserted into the warn information.

Alternatively, it may be checked whether the user had a valid registration before or not and whether a de-
10 registration of the user had been performed, and wherein in case the user had a valid registration before and a de-registration of the user had been performed, the information that a re-registration is required is inserted into the warn information.

15 Thus, also the condition that the user had a valid registration before and a de-registration was performed is considered, and the user is informed about this condition.

20 The network may be a third generation network, wherein the generating step is performed in a proxy call state control function (P-CSCF).

25 The network may be a third generation network, and wherein the generating step is performed in a serving call state control function (S-CSCF).

The invention also proposes a network device being
30 connectable to a network, the network offering services to registered users, wherein the device is adapted to receive a message and to perform an automatic registration to the network in case the message contains a predetermined warn information. The warn information
35 may contain a warn-code, and/or may contain a warn-text.

- 5 -

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more readily understood with reference to the accompanying drawings in which:

5

Fig. 1 shows a diagram of the network system to which a first and a second embodiment is applicable,

Fig. 2 shows a signaling diagram of the procedure according to the first embodiment, and

10

Fig. 3 shows a signaling diagram of the procedure according to a second embodiment.

15

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following, preferred embodiments of the invention is described in more detail with reference to the accompanying drawings.

20

Fig. 1 shows a simplified network system to which the embodiments are applicable. The network system may be configured according to IP Multimedia Subsystem concepts as defined by the 3rd Generation Partnership Project (3GPP).

25

The network system comprises a home network of a User equipment (UE) and a visited network. The home network comprises a Serving Call State Control Function (S-CSCF) which controls services for the user (i.e., UE). The S-CSCF accesses an HSS (Home Subscriber Server) in order to obtain information regarding the user. The visited network comprises a Proxy Call State Control Function (P-CSCF) basically performs an interface function for

30
35

- 6 -

connecting the UE to the S-CSCF in his home network. S-CSCF is located in the home network of the UE, which is roaming in the visited network and attached to the P-CSCF.

5

Next, the first embodiment is described. According to the first embodiment, it is assumed that the user sends an SIP (Session Initiation Protocol) INVITE message before it sends a REGISTER to the network. The network returns a
10 403 Forbidden message to the user with a warning header.

In SIP, warning headers are used in response messages in order to carry additional information about the status of a response. Warning headers comprises the following
15 fields: warn-code, warn-agent and warn-text.

The warn-code is a number consisting of three digits. SIP-specific warn-codes start with a 3 as the first digit. The warn-agent indicates the name or pseudonym of
20 the server which adds the warning header. The warn-text is a plain text intelligible to the human user.

According to the present embodiment, the warning header comprises a warn-text of "Registration Needed". This
25 warn-text is associated with a 3GPP specific warn-code. Hence, it should start with another digit than 3 in order to distinguish it from SIP-specific warn-codes. The 3GPP warn-code should preferably trigger at UE a Register message to be sent towards the network.

30

Fig. 2 shows a signaling flow according to the first embodiment, which illustrates the above procedure in more detail. As mentioned above, it is assumed that the user (i.e., UE) is not registered to the network. That is, the
35 first action performed by the UE is sending a SIP INVITE

- 7 -

request to the P-CSCF, as indicated in step A1. In this example, it is assumed that the UE is not registered, and a corresponding response is sent back to the UE in step A2.

5

That is, in step A2, the P-CSCF returns a 4.xx final response, preferably a 403 Forbidden Message to the UE. In the 403 Forbidden Message, a warning header containing a warn-text of, e.g., "Registration Needed" and a
10 corresponding 3GPP specific warn-code is included. This warn-code should be standardized, and, for example, should preferably be defined by the IANA (Internet Assigned Numbers Authority).

15 The P-CSCF sends the 403 Forbidden Message to the UE in step A2. Thus, the UE is informed that the SIP INVITE message sent in step A1 was unsuccessful, and in addition the UE is also informed why the INVITE message was unsuccessful, namely, because the UE is not yet
20 registered to the network.

Preferably, the UE is triggered by the 403 Forbidden Message to send a SIP REGISTER message, as indicated in step A3. By using the above-mentioned 3GPP specific warn-
25 code, the UE can be triggered to automatically send such a register request without that the user has to input manually a corresponding request. That is, the UE may be adapted to automatically perform the registration in response to receiving the above-described warn-code.

30

After sending the SIP REGISTER message in step A3, the normal registration procedure is carried out. A detailed description thereof is omitted for simplifying the illustration.

- 8 -

It is noted that for the above-described automatic registration the warn-text is optional. That is, in order to trigger an automatic registration of the UE, only
5 the warn-code is necessary.

The same procedure as described above may be used to trigger a Register from the UE when an INVITE arrives to the P-CSCF after the Registration of the user expired in
10 P-CSCF, i.e., in a case in which the registration is timely limited. The "Registration Needed" warning header is preferably only be inserted by a P-CSCF, since this element provides an interface of the network to the UE.

15 It is noted that in the above description it is assumed that information about the status of user (i.e., registered or not registered) is stored in the HSS. However, this information may also be stored in a database in the S-CSCF or also in the P-CSCF. In this
20 way, the need for forwarding the inquiries to the HSS or to the home network is eliminated.

Next, a second embodiment is described with reference to Fig. 3.

25 According to the second embodiment, it is assumed that the UE was registered, but that the home network where the UE is registered performs a Network Initiated De-registration for this user. This implies that S-CSCF will
30 delete the user from the registered users' database. This may not implicitly imply that the P-CSCF will also delete it.

In the following, signalling for this case is described
35 by referring to Fig. 3. In step B1, the UE sends a SIP

- 9 -

INVITE message to the P-CSCF. There might be cases when the UE's registration is valid in P-CSCF but not valid anymore in S-CSCF. Hence, the P-CSCF forwards the SIP INVITE message to the S-CSCF in step B2.

5

However, the S-CSCF finds that the UE has been de-registered, or the timer associated with the registration expired, etc., i.e., UE no longer has a valid registration. Hence, the S-CSCF returns a 403 Forbidden response to the user. Since in this scenario the user might recently have a valid registration, the S-CSCF preferably inserts another warning header with a warn-text of "Re-Registration Needed". As described in the first embodiment, this warn-text should preferably be associated with a 3GPP specific warn-code (which may be the same as according to the first embodiment). The S-CSCF sends the 403 Forbidden message composed in this way to the P-CSCF (step B3), which in turn forwards it to the UE (step B4).

20

Similar as according to the first embodiment, the warn-text and the warn-code should preferably trigger at the UE a Re-Registration to be sent towards the network, as indicated in step B5. After this, the normal registration procedure is carried out. A detailed description thereof is omitted for simplifying the illustration.

The "Re-Registration Needed" warn-text is preferably only be inserted by an S-CSCF.

30

It is noted that in SIP a Registration and RE-Registration look exactly the same. The reason for having different warn-texts is to inform the user at the UE that the user is not registered to the network yet or that a

- 10 -

recent valid registration was just invalidated by the network, respectively.

It is noted that the invention is not limited to the
5 embodiments described above. Various amendments and modifications are possible.

In particular, the embodiments may be combined. That is, both procedures may be applied in a network system, and
10 depending on the situation the 403 Forbidden message sent to the UE may include the "Registration Needed" or the "Re-Registration Needed" warn-text and a corresponding warn-code.

15 Furthermore, it is noted that the IP Multimedia Subsystem is only taken as an example. That is, the invention may be applied to any network system in which a user has to be registered before he may obtain any services.

20 Moreover, also the SIP protocol is only taken as an example. Instead, any protocol messages into which specific warn-texts and/or warn-code may be included, can be used.

25

- 11 -

Claims

1. A method for controlling a network, wherein the
5 networks offers services to registered users, the method comprising the steps of
receiving (A1; B1, B2) a service request from
network device (UE) of a user,
checking whether the user is registered or not, and
10 if the user is not registered, generating a response
message including a warn information and sending (A2; B3
to B4) the response message to the network device (UE) of
the user.
- 15 2. The method according to claim 1, wherein the
response message is a SIP (Session Initiation Protocol)
response.
3. The method according to claim 2, wherein the SIP
20 response is a 403 Forbidden response.
4. The method according to claim 1, wherein the warn
information comprises a warn-text.
- 25 5. The method according to claim 4, wherein the warn-
text is a predefined warn-text.
6. The method according to claim 1, wherein the warn
information comprises a predefined warn-code.
- 30 7. The method according to claim 1, further comprising
the step of triggering (A3; B5) an automatic registration
in the network device (UE) of the user.

- 12 -

8. The method according to claim 1, further comprising the step of checking whether the user had a valid registration before or not,
wherein in case the user had no valid registration
5 before, in the generating step, the information that a registration is required is inserted into the warn information.
9. The method according to claim 1, further comprising
10 the steps of
checking whether the user had a valid registration before or not and whether a de-registration of the user had been performed, and
wherein in case the user had a valid registration
15 before and a de-registration of the user had been performed, in the generating step, the information that a re-registration is required is inserted into the warn information.
- 20 10. The method according to claim 8, wherein the network is a third generation network, and wherein the generating step is performed in a proxy call state control function (P-CSCF).
- 25 11. The method according to claim 9, wherein the network is a third generation network, and wherein the generating step is performed in a serving call state control function (S-CSCF).
- 30 12. A network control device for controlling a network, wherein the networks offers services to registered users, the device is adapted
to receive a service request, to check whether a user requesting the service is registered or not, and

- 13 -

generate a response message containing a warn information to the user, in case the user is not registered.

13. The device according to claim 12, wherein the
5 response message is a SIP (Session Initiation Protocol) response.

14. The device according to claim 13, wherein the SIP
10 response is a 403 Forbidden response.

15. The device according to claim 12, wherein the warn
information comprises a warn-text.

16. The device according to claim 15, wherein the warn-
15 text is a predefined warn-text.

17. The device according to claim 12, wherein the warn
information comprises a predefined warn-code.

20 18. The device according to claim 12, wherein the device
is adapted to check whether the user had a valid
registration before or not, and, in case the user had no
valid registration before, to insert into the warn
information the information that a registration is
25 required.

19. The device according to claim 12, wherein the device
is adapted to check whether the user had a valid
registration before or not and to check whether a de-
30 registration of the user had been performed, and to
insert into the warn information the information that a
re-registration is required in case the user had a valid
registration before and a de-registration of the user had
been performed.

- 14 -

20. The device according to claim 1 or 18, wherein the network is a third generation network, and wherein the network control device is a proxy call state control
5 function (P-CSCF).

21. The device according to claim 1 or 19, wherein the network is a third generation network, and wherein the inserting step is performed in a serving call state
10 control function (S-CSCF).

22. A network system, comprising a network control device according to any one of the claims 12 to 21, further comprising a network device (UE), wherein the
15 network device is adapted to perform an automatic registration in reaction to the response message.

23. A network device being connectable to a network, the network offering services to registered users, wherein
20 the device is adapted to receive a message and to perform an automatic registration to the network in case the message contains a predetermined warn information.

24. The network device according to claim 23, wherein
25 the warn information contains a warn-code.

25. The network device according to claim 23, wherein the warn information contains a warn-text.

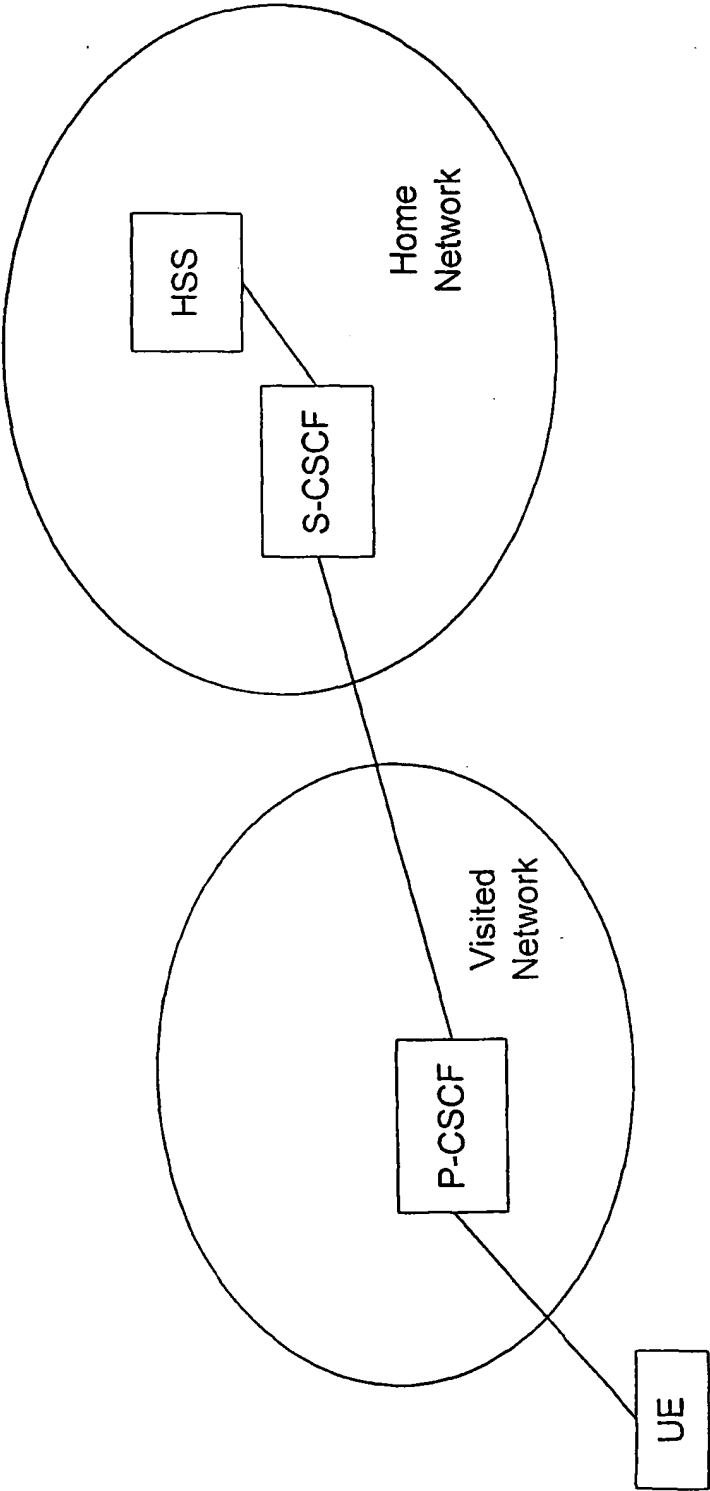


Fig. 1

2/2

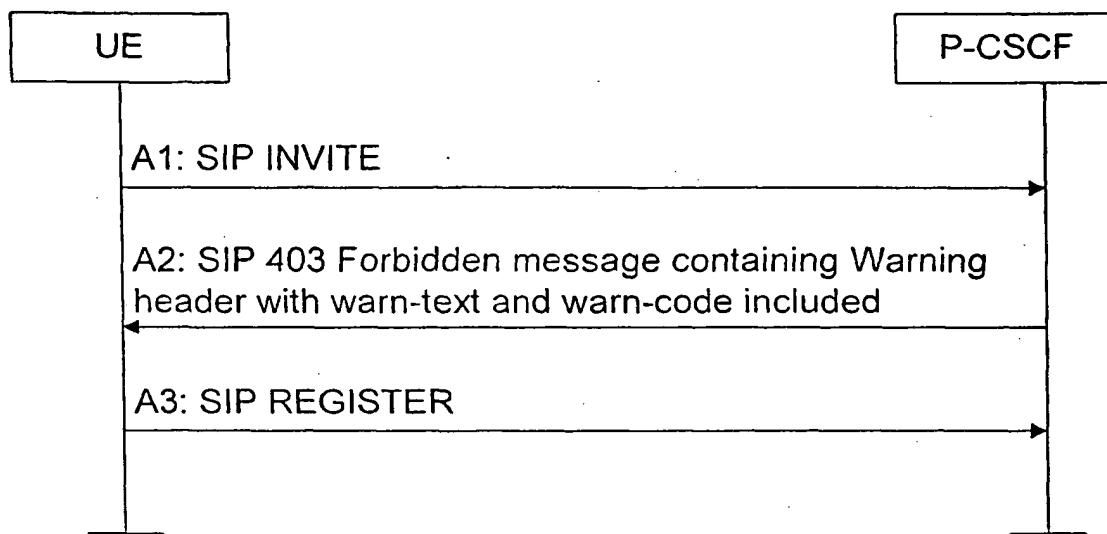


FIG. 2

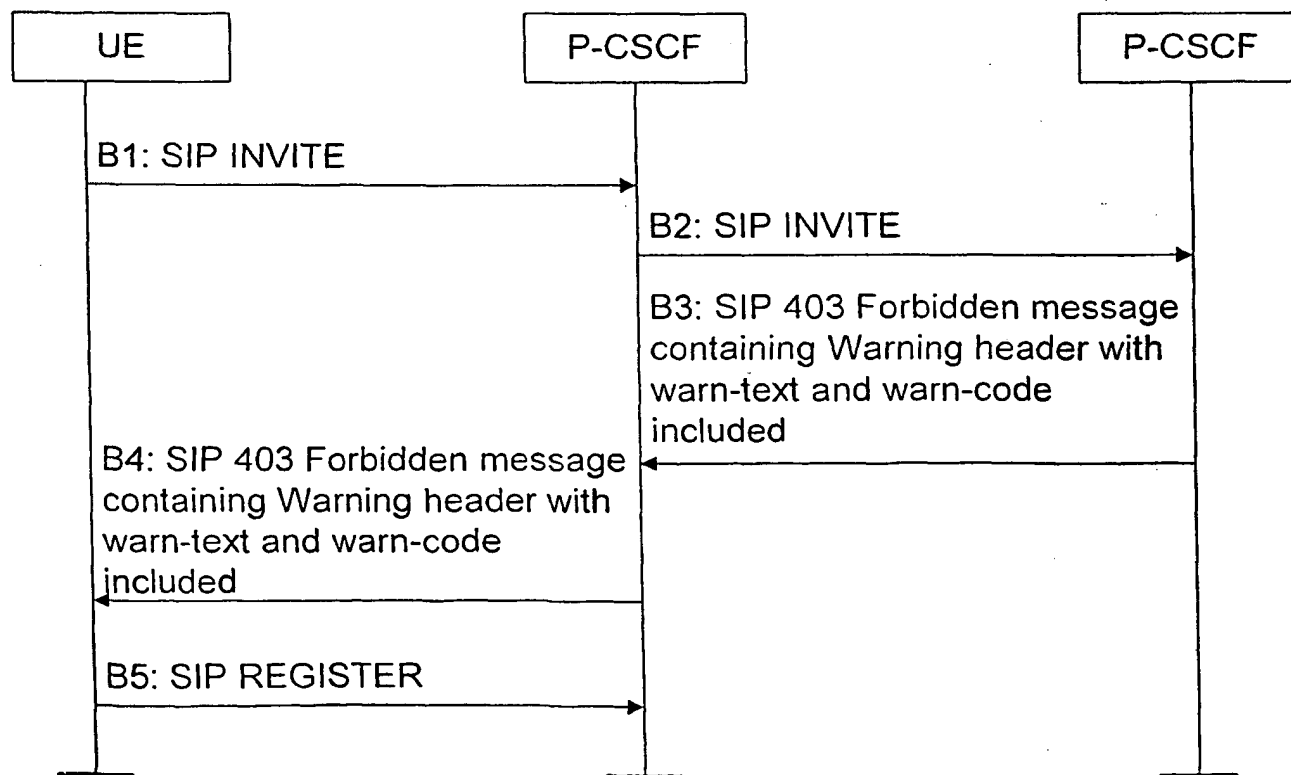


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 01/05272

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 051 054 A (AT & T WIRELESS SERVICES INC) 8 November 2000 (2000-11-08) column 6, line 35 - line 54 column 9, line 25 -column 10, line 26 -----	1,4-6, 12, 15-17,23
A	WO 99 52304 A (NOKIA TELECOMMUNICATIONS OY ;KAALL JAN (FI)) 14 October 1999 (1999-10-14) page 1, line 34 -page 2, line 9 page 2, line 28 -page 3, line 1 page 15, line 21 -page 16, line 19 -----	1-25

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

6 February 2002

Date of mailing of the international search report

12/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dionisi, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/05272

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1051054	A	08-11-2000	BR 0002292 A	16-10-2001
			EP 1051054 A2	08-11-2000
			JP 2000349903 A	15-12-2000
WO 9952304	A	14-10-1999	FI 980651 A	24-09-1999
			AU 3036999 A	25-10-1999
			CN 1297656 T	30-05-2001
			EP 1064802 A1	03-01-2001
			WO 9952304 A1	14-10-1999